

# FUHO IP CAMERA


## FIB-IG903




### FEATURES

- ▶ Network : IP Configure
- ▶ Video Setting : Resolution, Frame Rate, Compression Rate, P/I Rate
- ▶ Network Protocol : TCP/UDP/IP, DHCP,SMTP, HTTP, NTP,DDNS,FTP,TFTP,ARP,UPnP,PPPoE
- ▶ Transmission Format:MPEG-4 video stream with 1 way PCM audio
- ▶ Support the IE5.0 or the above version.
- ▶ Volume control: Audio on/off
- ▶ Support 1-way audio and the working distance of the built-in MIC can reach 5M.
- ▶ The maximum users online via PC are up to 10; and online via RTSP mobile phone are up to 5.
- ▶ Both connections allow users online at the same time but the image quality is depending on your bandwidth.
- ▶ Support the RTSP mobile phone and don't support the JAVA mobile phone.

### DIAGRAM OF INSTALLATION

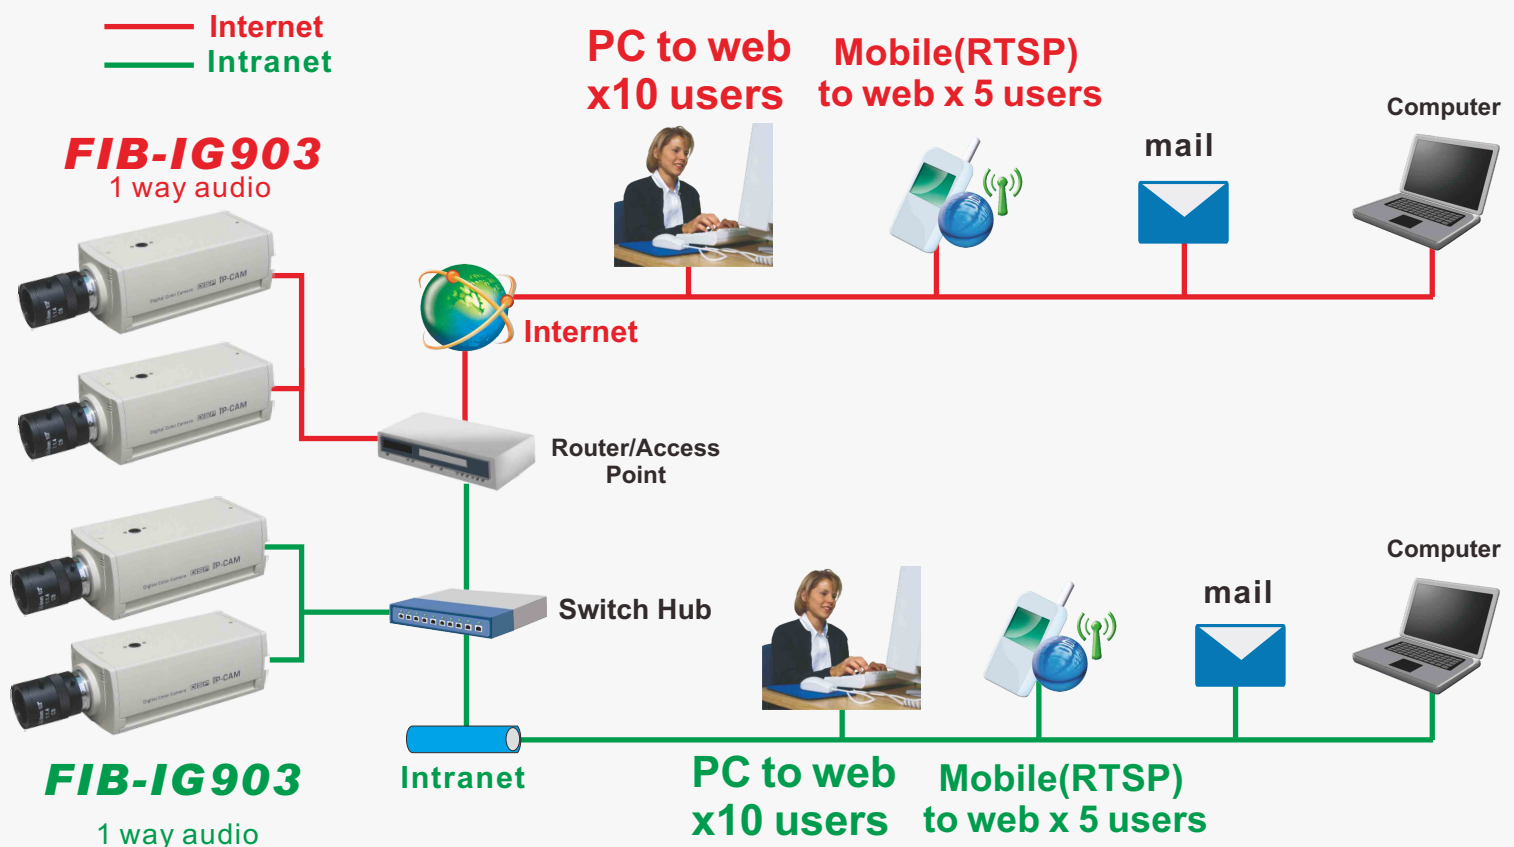

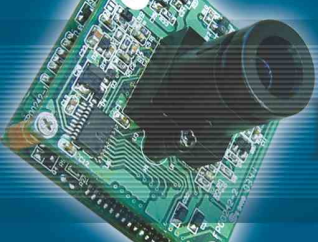


# FUHO IP CAMERA

## FIB-IG903

### REAR PANEL

- ① RJ45 Jack
- ② DC12V IN
- ③ Video output(BNC)

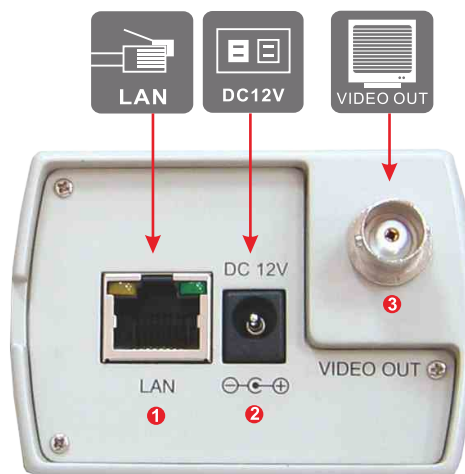

### Specification

|                         |   |                        |
|-------------------------|---|------------------------|
| Camera type             | Compatible with BT.656 · 28.63636MHz for NTSC · 28.375MHz for PAL |                        |
| LENS                    | Support C/CS Mount  |                        |
| Compression             | MPEG4 / JPEG  |                        |
| Client View             | NTSC  | PAL                    |
| (Resolution/Frame Rate) | D1 : 720x480 / 30   | D1 : 720x576 / 25      |
|                         | CIF : 360x240 / 30  | CIF : 360x288 / 25     |
|                         | Half-D1 : 720x240 / 30  | Half-D1 : 720x288 / 25 |
|                         | QCIF : 180x120 / 30   | QCIF : 180x144 / 25    |
| Network Protocol        | TCP/UDP/IP, DHCP,SMTP, HTTP, NTP,DDNS,FTP,TFTP,ARP,UPnP,PPPoE     |                        |
| Transmission Format     | MPEG-4 video stream with 1 way PCM audio                          |                        |
| Recorded format         | MPEG-4 video stream with 1 way PCM audio                          |                        |
| Motion Detection        | Movement on image   |                        |
| Controller Interface    | Internet Explorer 5.0 or above                                    |                        |
| Setup via IE            | CAMERA : AES · BLC · AGC · MIRROR                                 |                        |
|                         | Network : IP Configure · PPPoE · DDNS                             |                        |
|                         | Video : Resolution · Frame Rare · Compression Rate · P/I Rate     |                        |
|                         | Audio on/off  |                        |
|                         | Update Firmware   |                        |
| Memory                  | 2M Byte Flash ROM / 8M Byte SDRAM / 32M Byte DDR                  |                        |
| Network                 | 10/100 Ethernet   |                        |
| Audio                   | Built-in high performance Microphone ranges within 5 meters       |                        |
| I/O Ports               | Power input · RJ45 network port · Video Output port               |                        |
| Dimensions              | 158.5mm (L) × 70mm (W) × 50mm (H) (without lens)                  |                        |
| Weight                  | About 380 g   |                        |
| Power Supply            | DC 12V / 500mA  |                        |
| Operating Temperature   | 5° C ~ 40° C  |                        |
| Storage Temperature     | 0° C ~ 70° C  |                        |
| Operating Humidity      | 10%~80%   |                        |